

CTEZED 20.4 HN on ISUZU

↑ 20 m

→ 8,2 m

👤👤 200 kg

Compactness and versatility, to carry out different works at height

Compact.
Easy to maneuver.
Easy to maintain.

CTEZED 20.4 HN on ISUZU

20 m of working height, 8,2 m of outreach and 200 kg of load capacity in absolute safety



**HN
Stabilisation**



**Stability
at height**



Compactness



**Unrestricted
working area**

TECHNICAL DATA

- » Sigma Boom + telescopic boom with single extension
- » Hydraulic hoses and electric wires inside the booms
- » $\pm 310^\circ$ Turret rotation
- » Proportional, simultaneous electrohydraulic controls from basket and ground
- » Duplicated ground/basket control stations
- » Truck Engine start&stop at both control stations
- » Anti-slip aluminum deck
- » Aluminum platform basket
- » $\pm 65^\circ$ hydraulic basket rotation
- » Master/Slave hydraulic basket levelling
- » 4 hydraulic outriggers HS+HS with ground contact sensors
- » Full performances with narrow jacking
- » Complete automatic closing including basket centering
- » Automatic basket only or turret only centering available as option
- » Engine rpm management
- » CTE Connect system to limit outreach and working height available as option
- » Cabin anticollision device
- » Hydraulic pump powered by vehicle PTO
- » Hand pump for emergency operation
- » PTO engaged buzzer
- » Bubble spirit level
- » Hour meter
- » Interlock booms/outriggers
- » 230 V AC available at the basket control station
- » Standard boom colours blue (RAL 5017) and white (RAL 9003)
- » Customized colour and schemes available upon request
- » EN 280:2015 CE certified



watch the video

STRENX™
PERFORMANCE STEEL

IPAF



SSAB STEEL



FACILITATED ACCESS





EASY TO MANEUVER





UP & OVER


OUTRIGGER FOOTPRINT

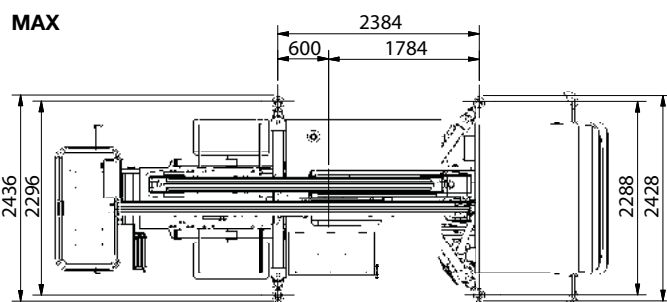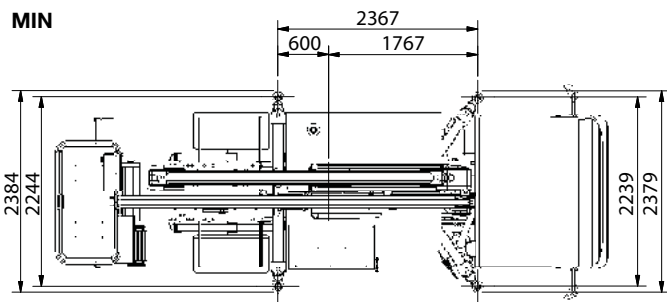

DIMENSIONS

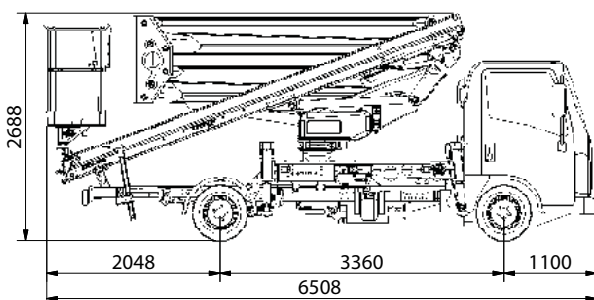

WORKING ENVELOPE

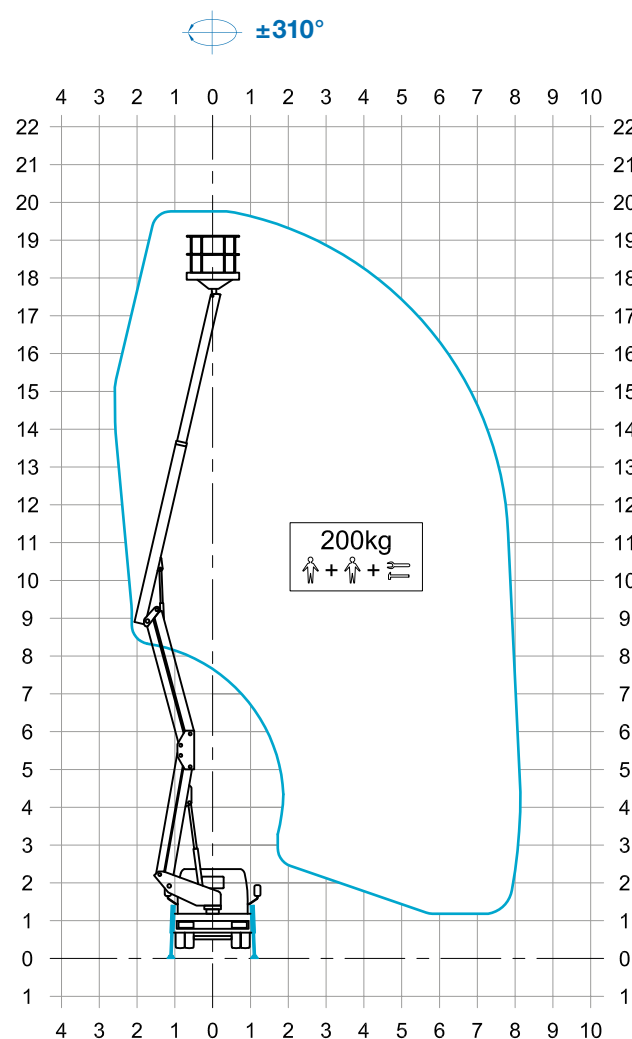

	20* m		1,4 x 0,7 x 1,1 m
	18* m		8,2* m
	200** kg		GVW min 3.500 kg
	220*** kg		


* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

** 280 kg with Load cell option.

*** with load cell option.



**Articulated truck-mounted platforms
range from 20 m to 32 m**

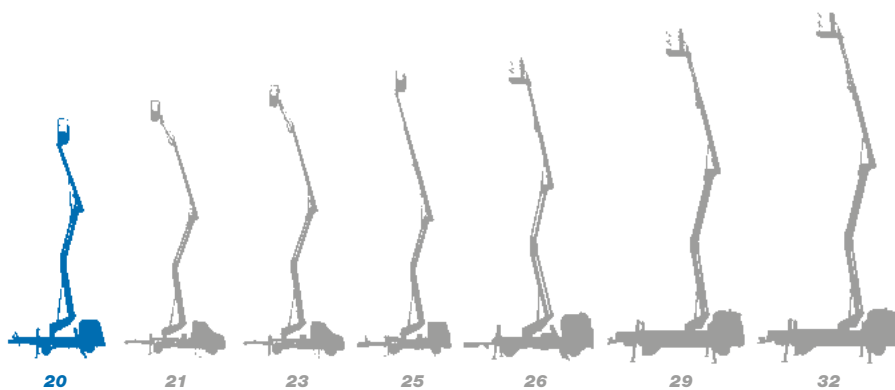

- ★ Most versatile boom configuration
- ★ Most compact machine in its class
- ★ Clean top boom
- ★ Friendly to use intuitive controls
- ★ Easy maintenance
- ★ Excellent boom rigidity during operation



**We are CTE, one of the largest
european groups in the field of
lifting people and handling of material.**



**After sales
assistance**



**Service
spare parts**



**Scheduled
maintenance**



**On-site
assistance**



**Authorized
workshops**

Efficient services, innovative technical solutions, timely assistance, professional advice and training: 'Work Becomes Easy' is all this. A style, a philosophy at the heart of which are our customers, their safety, their quality of life. For this reason there is a group in CTE united by ideas, motivation and passion to simplify the work of companies active in the lifting of people and objects.



CTE s.p.a.
Via Caproni, 7
38068 Rovereto (TN)

Factory
Loc. Terramatta, 5
37010 Rivoli Veronese (VR)

HIGHER
PLATAFORMAS AEREAS
Teléfono: 687.953.751
www.higher.es



UNI EN ISO 9001:2008 IT 61659